
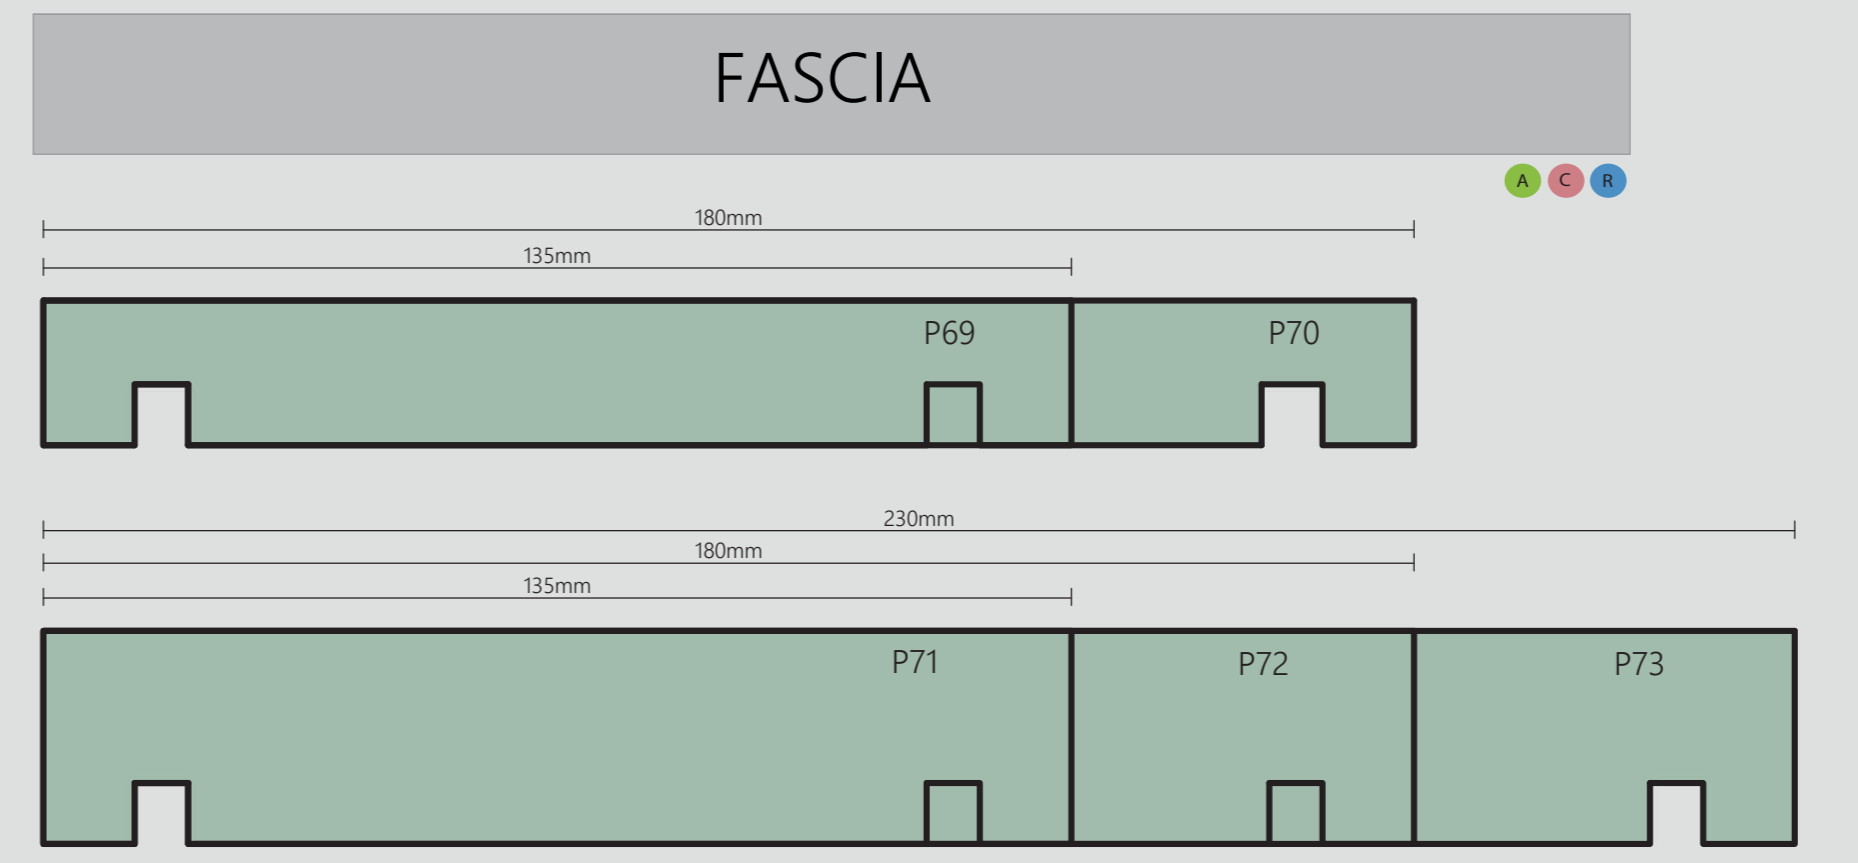
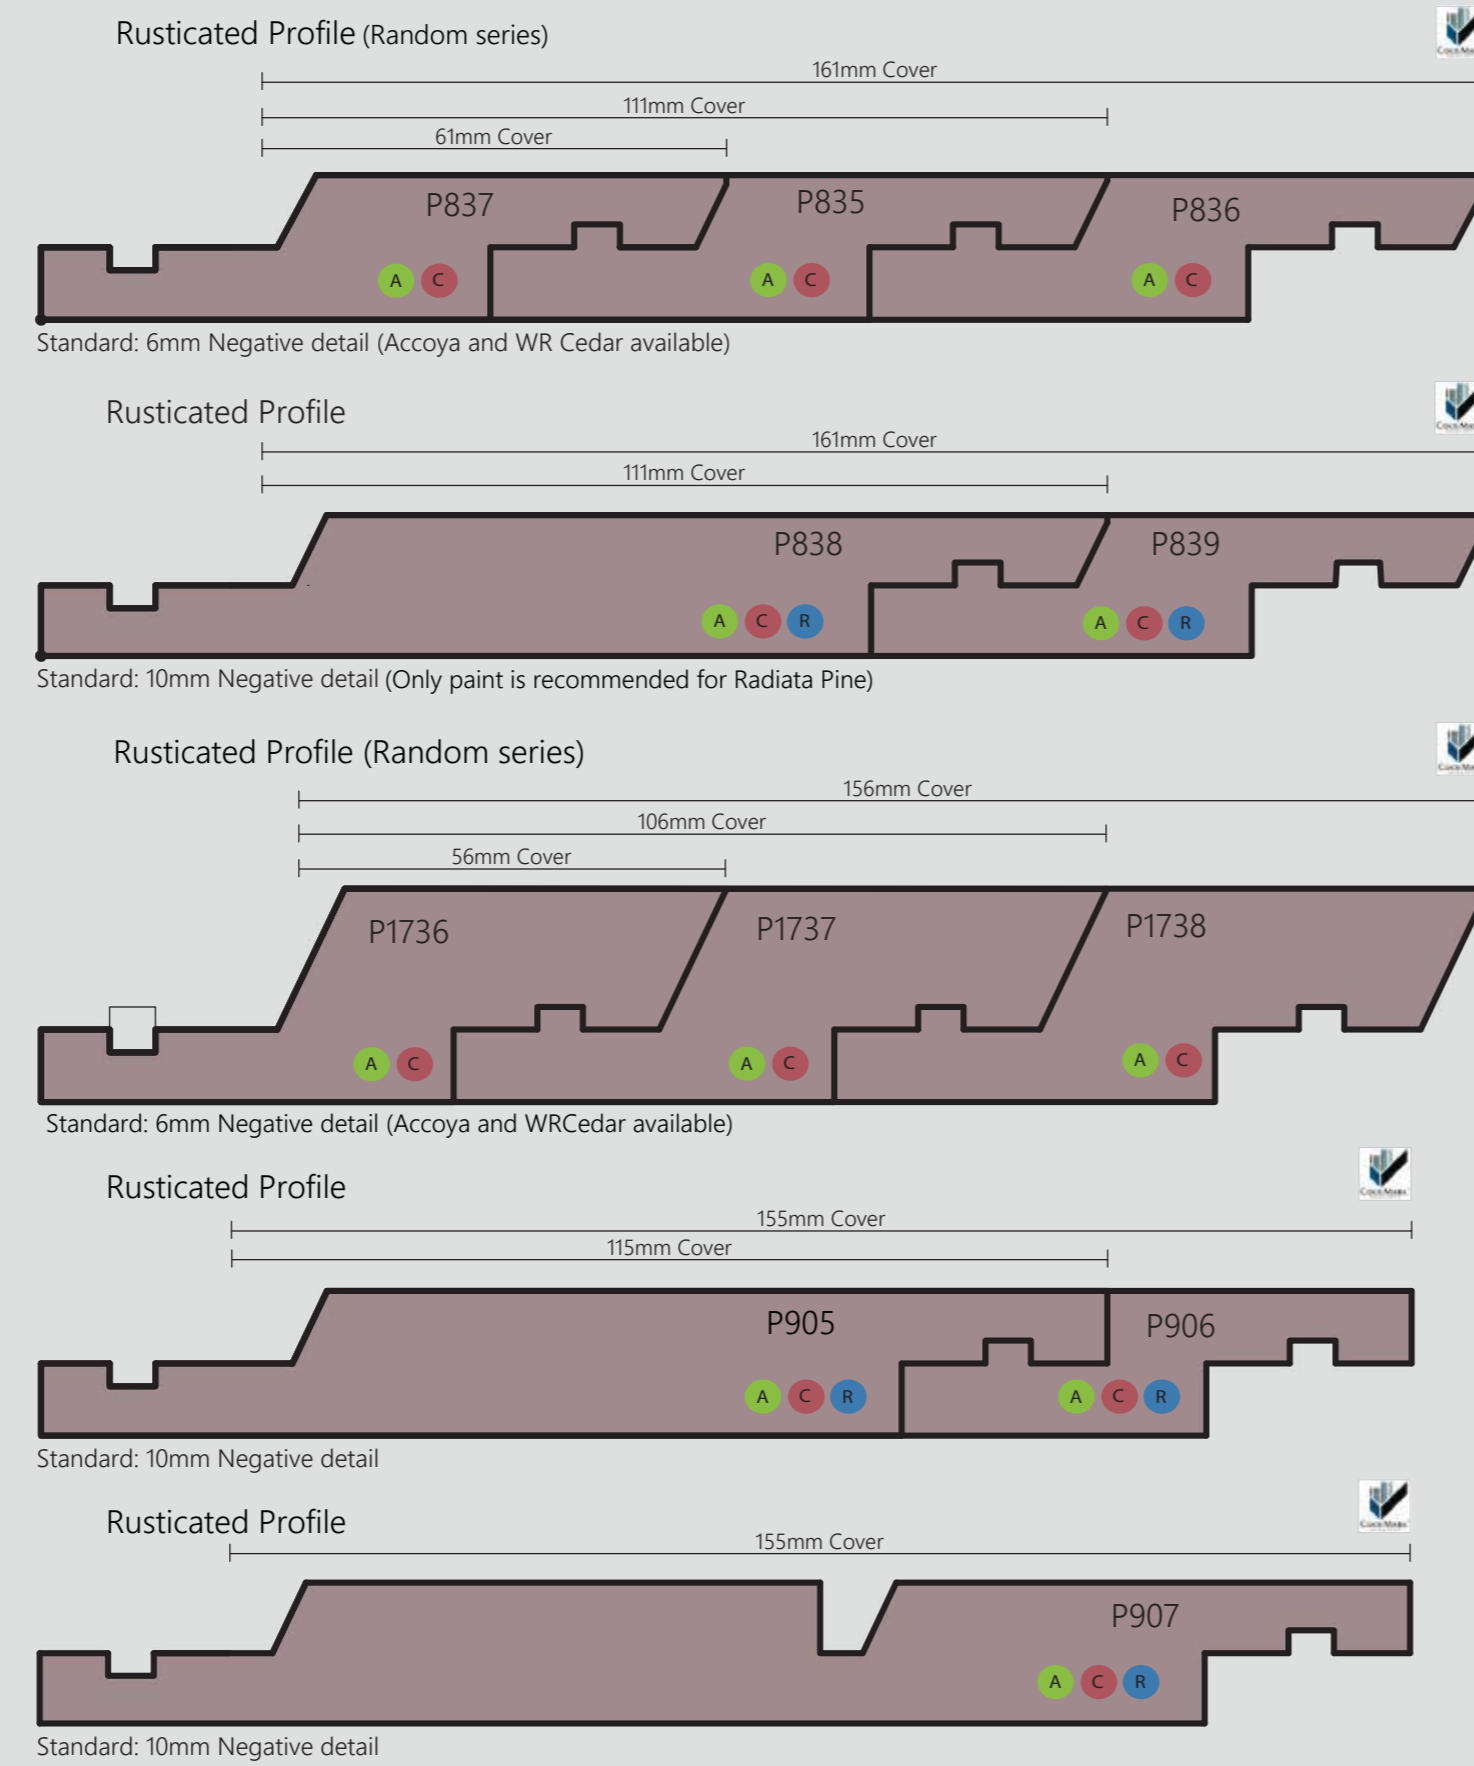





HORIZONTAL WEATHERBOARD PROFILES

A ACCOYA® 19mm thick **C** WESTERN RED CEDAR 18.5mm thick **R** RADIATA PINE 19mm thick

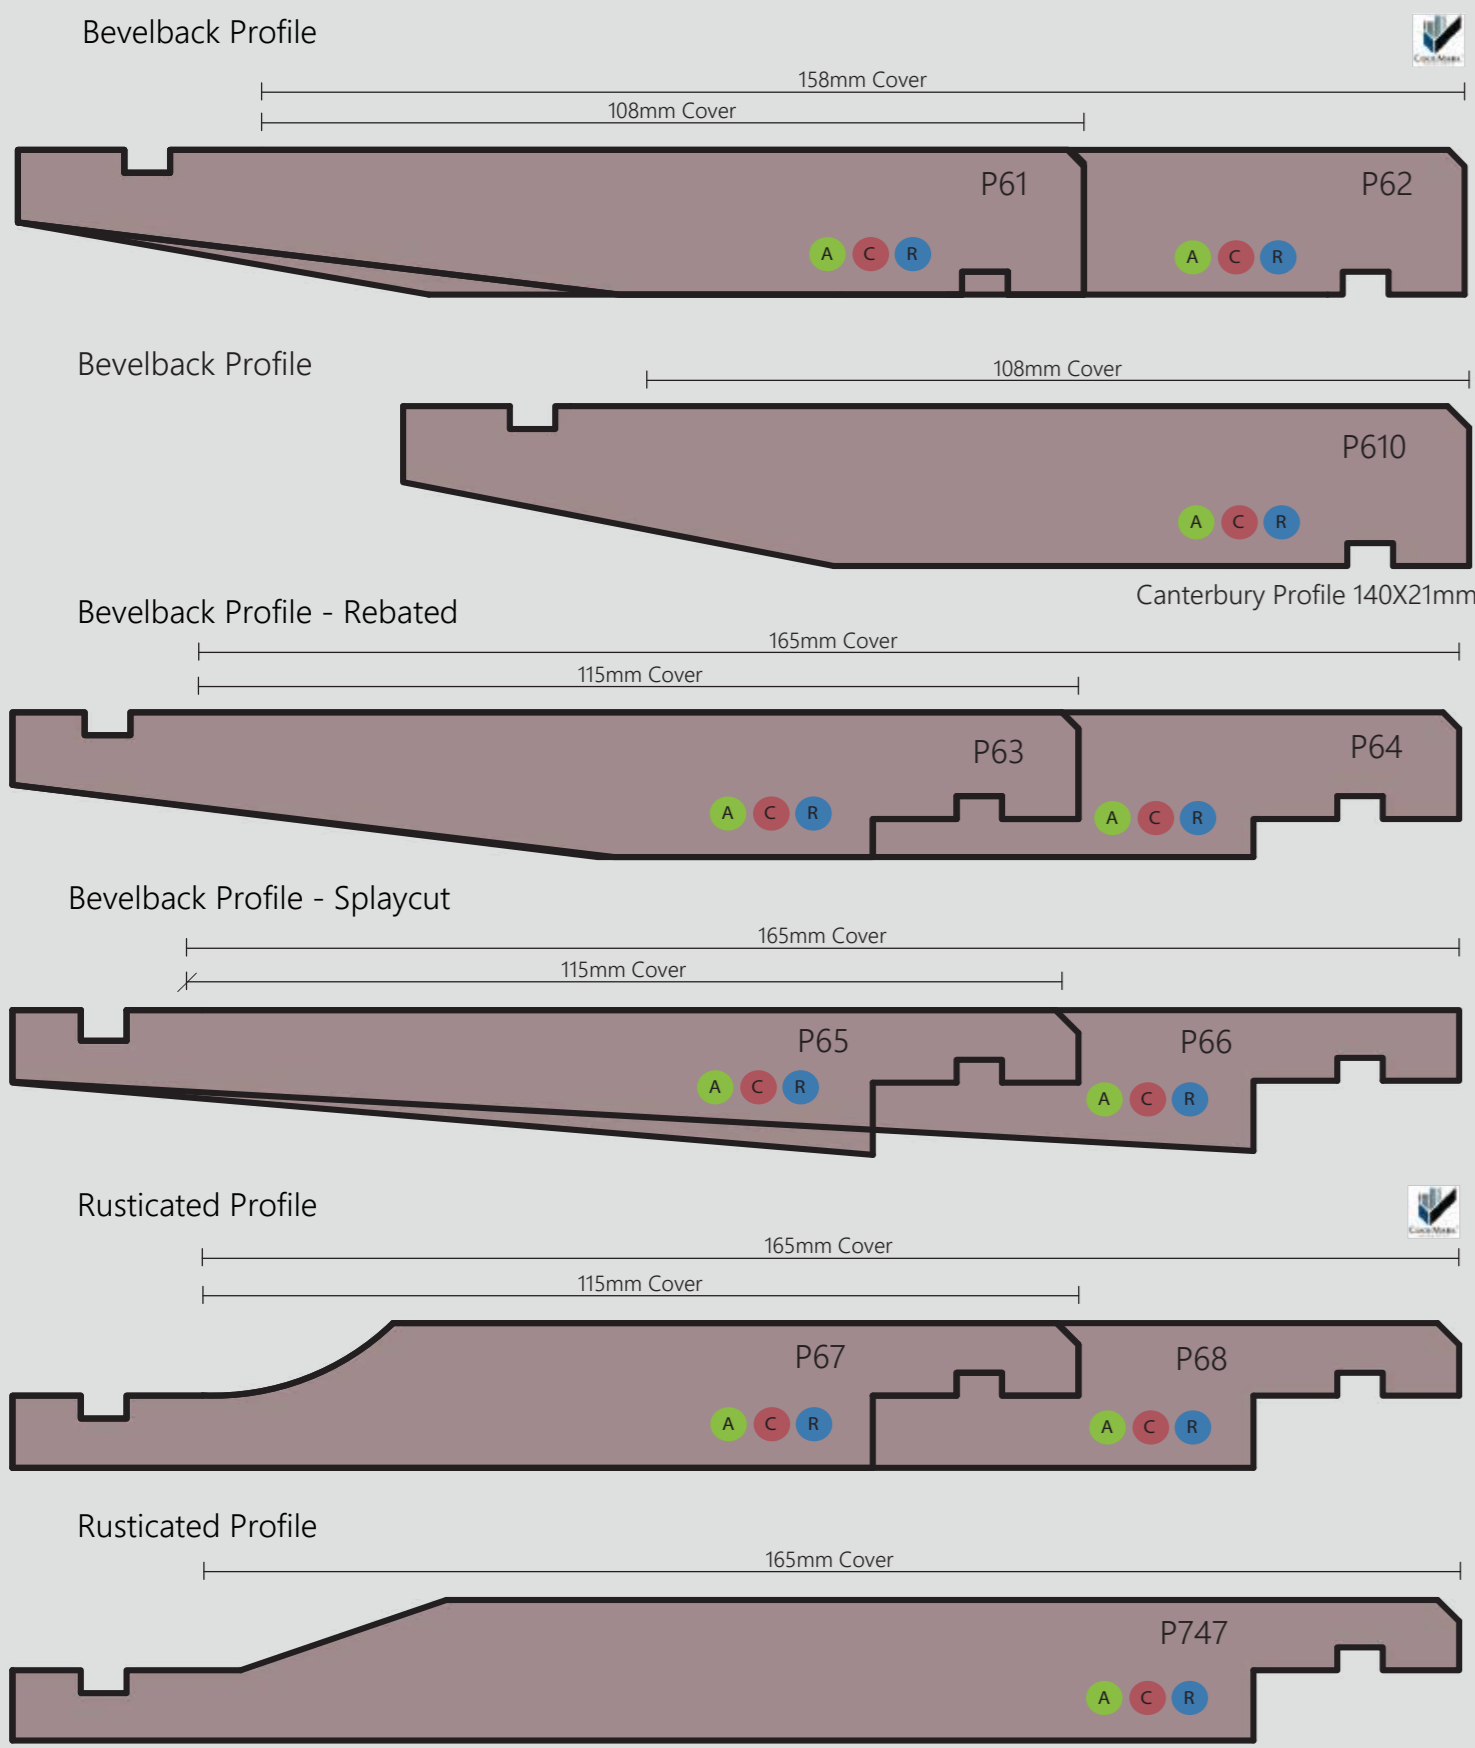


VERTICAL WEATHERBOARD PROFILES

A ACCOYA® 19mm thick **C** WESTERN RED CEDAR 18.5mm thick **R** RADIATA PINE 19mm thick

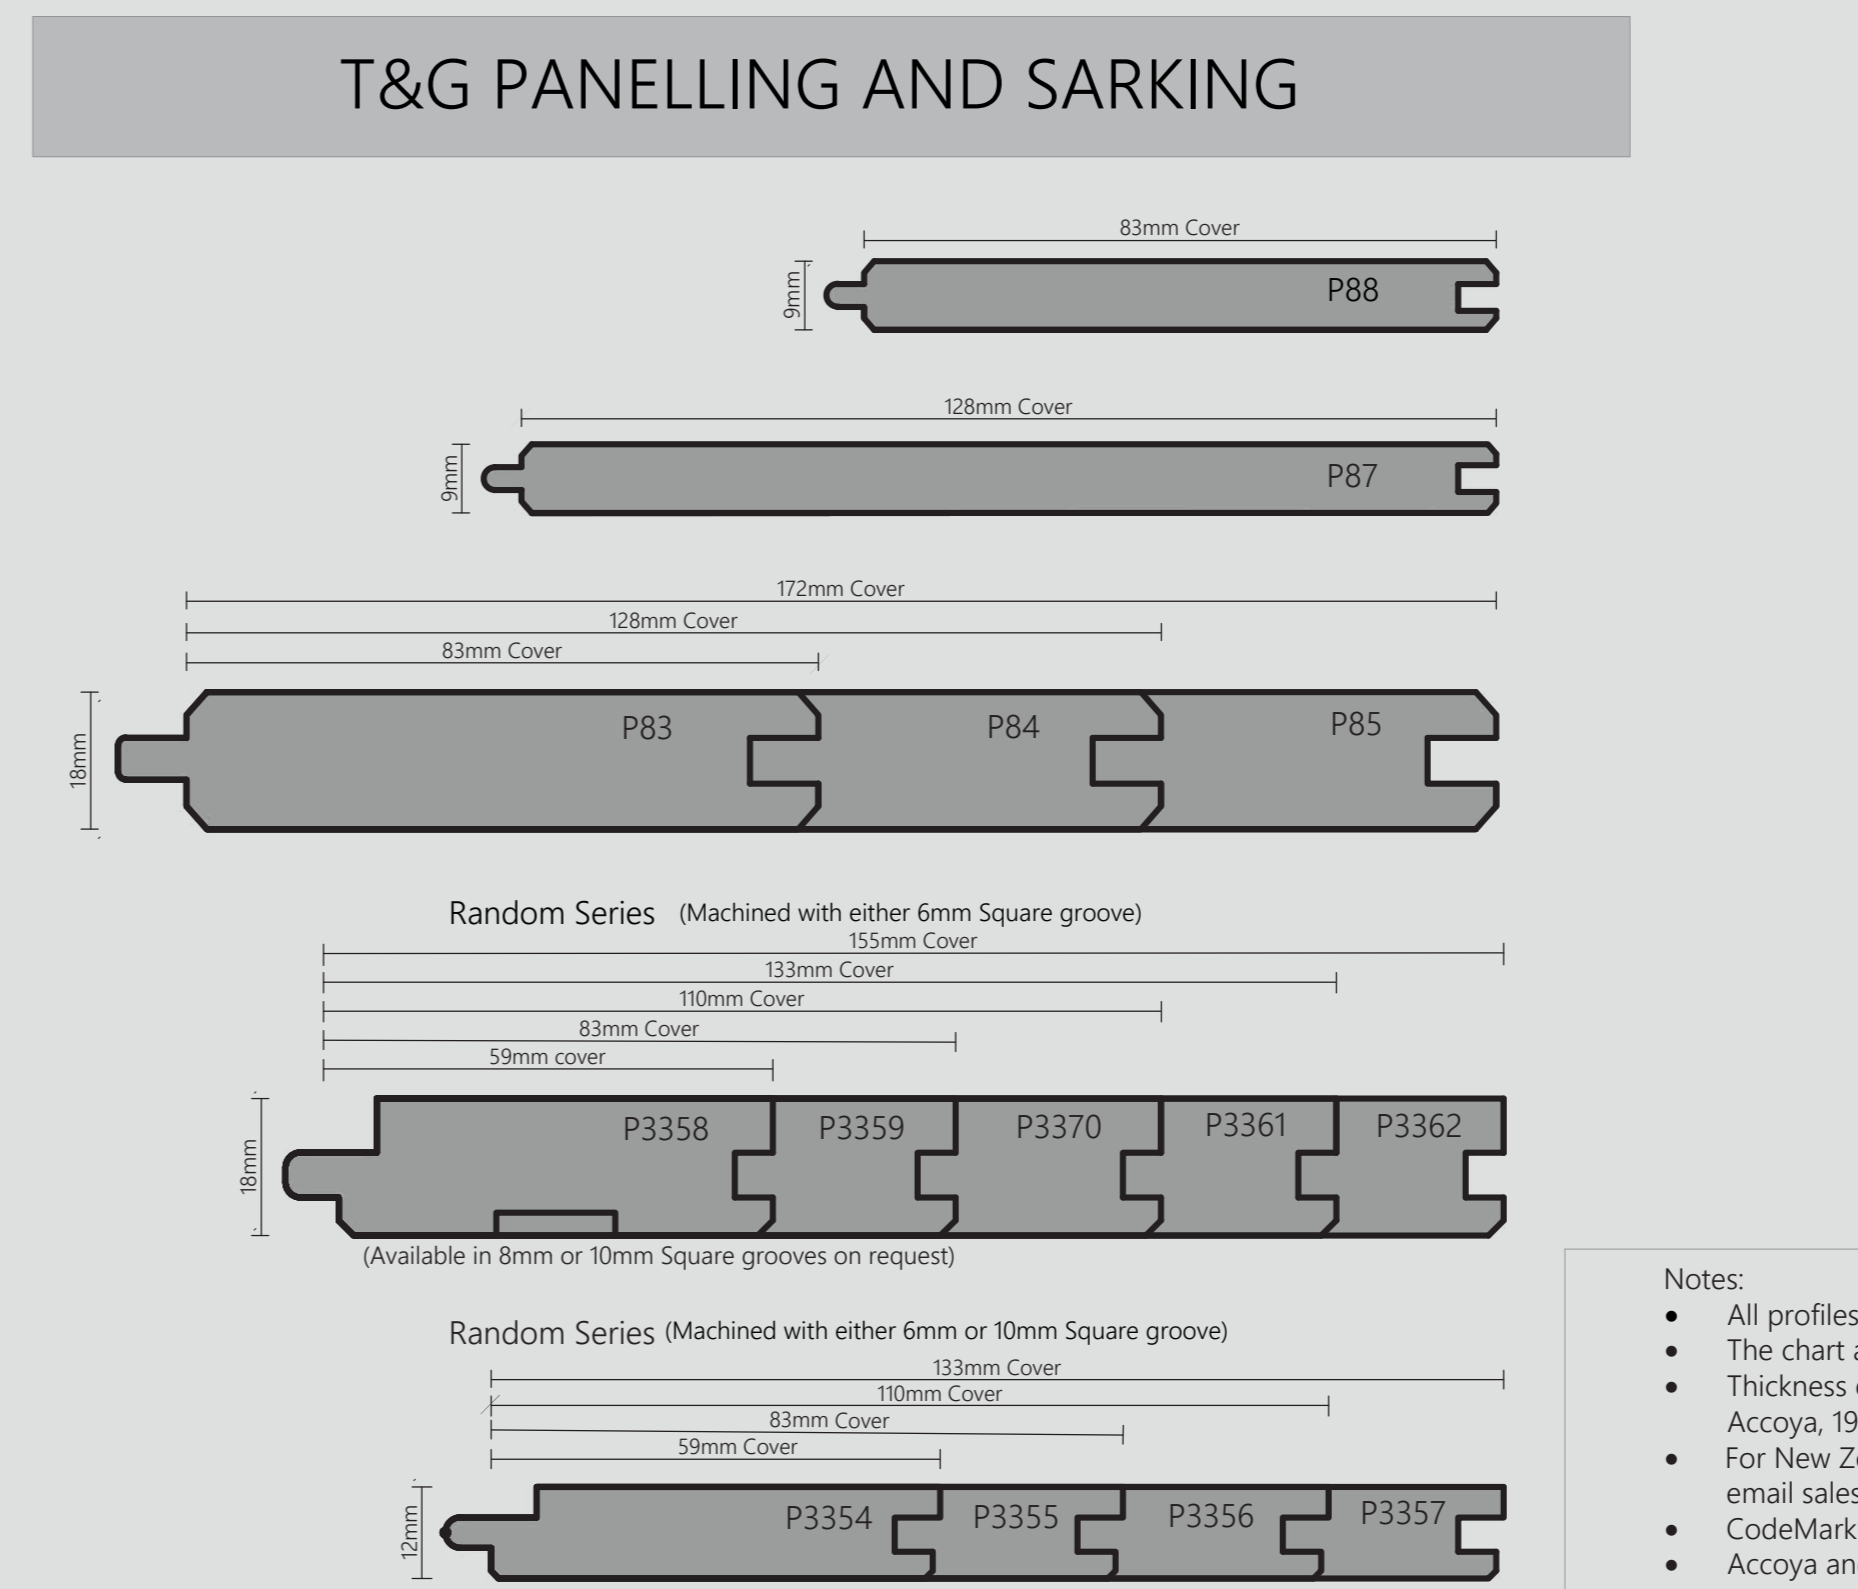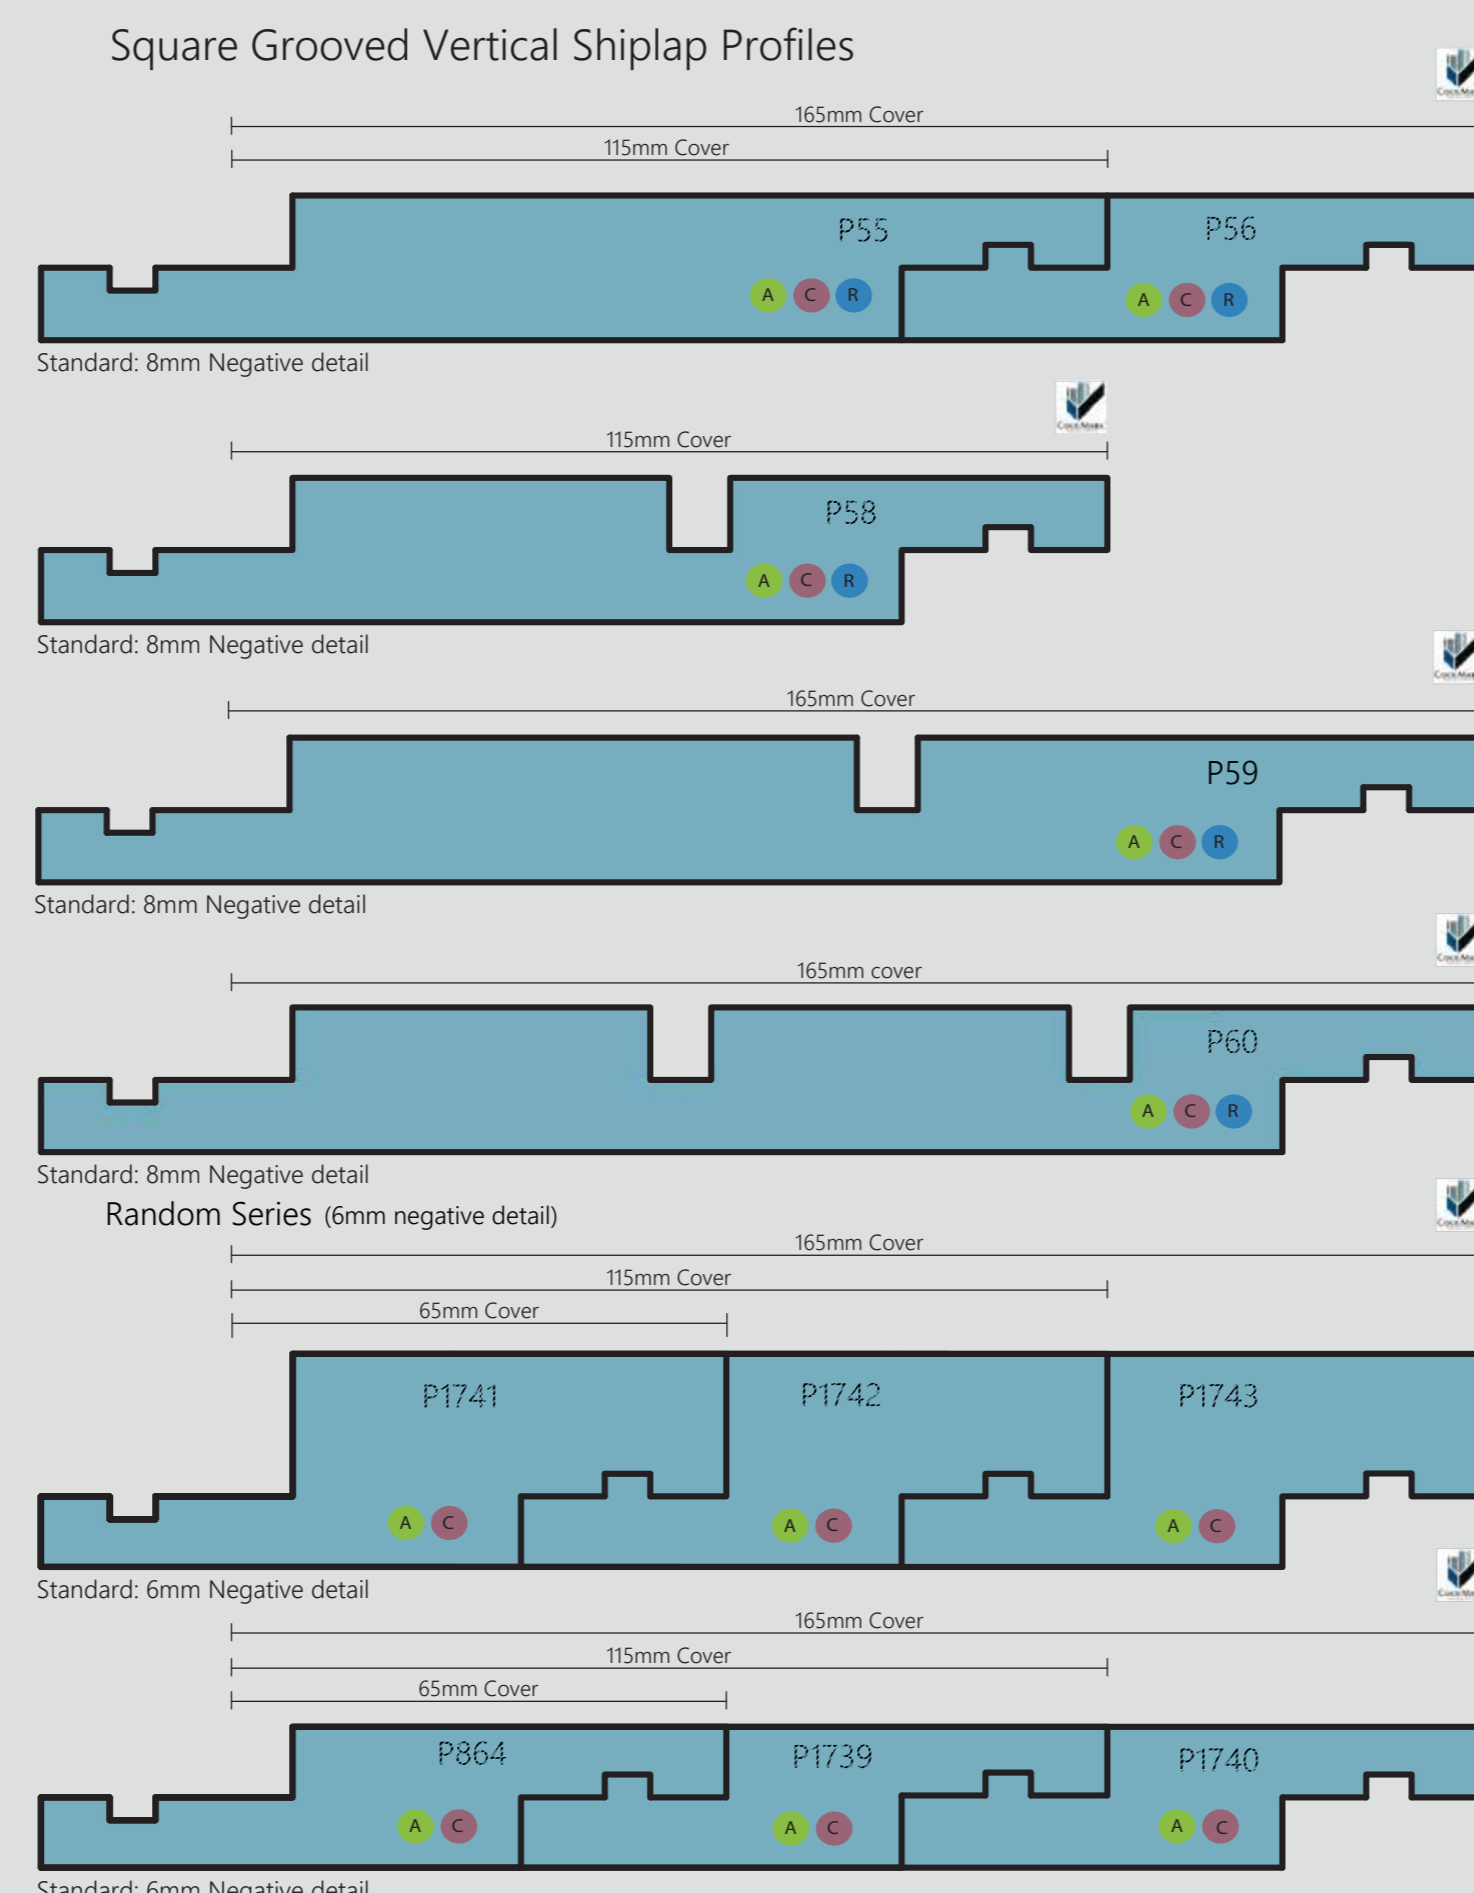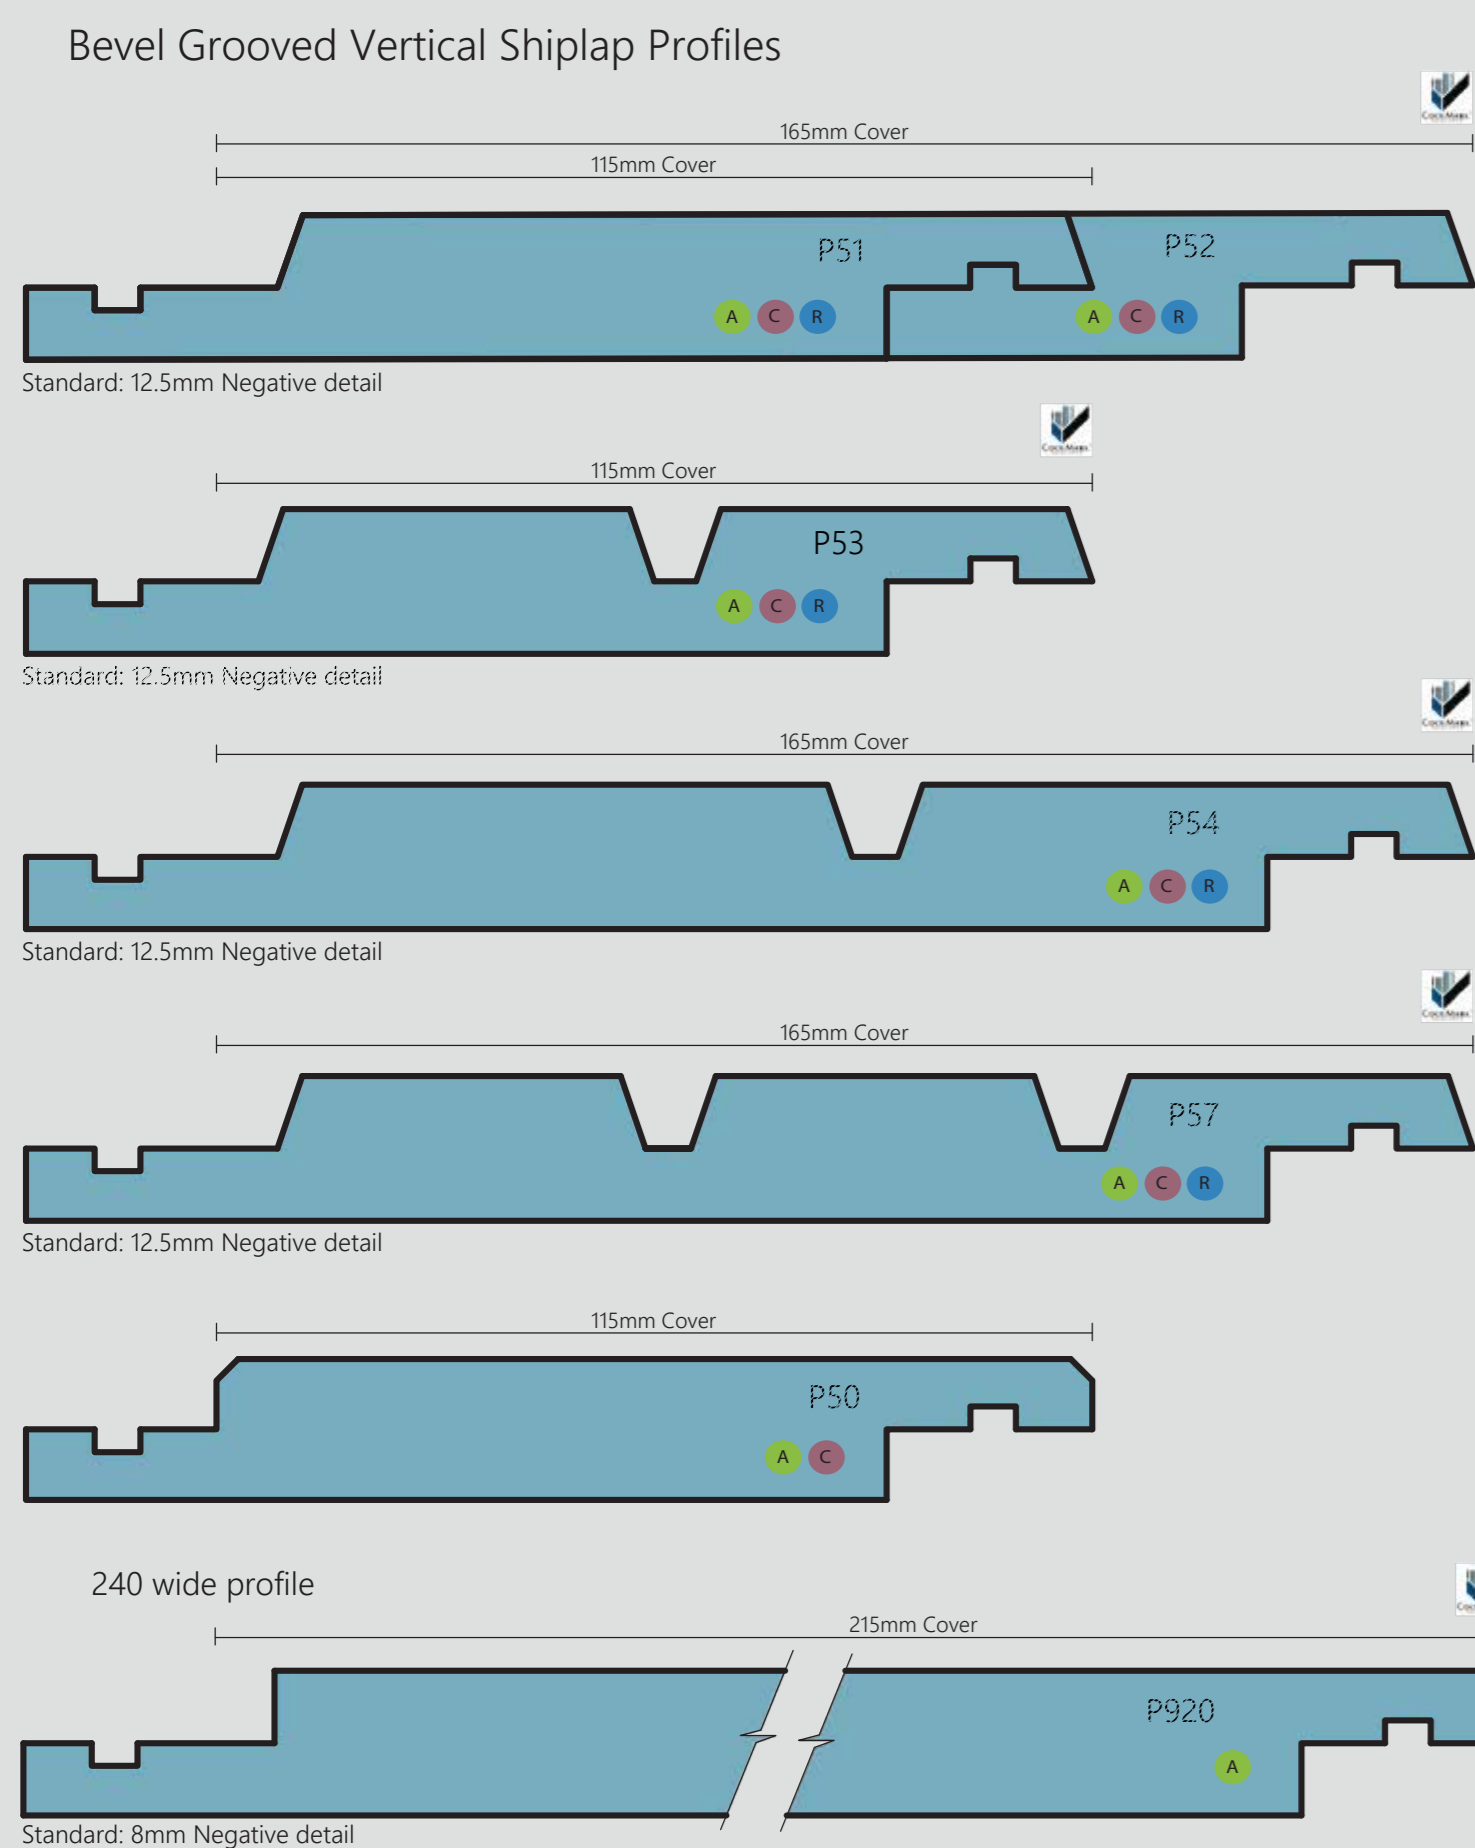

MOULDINGS

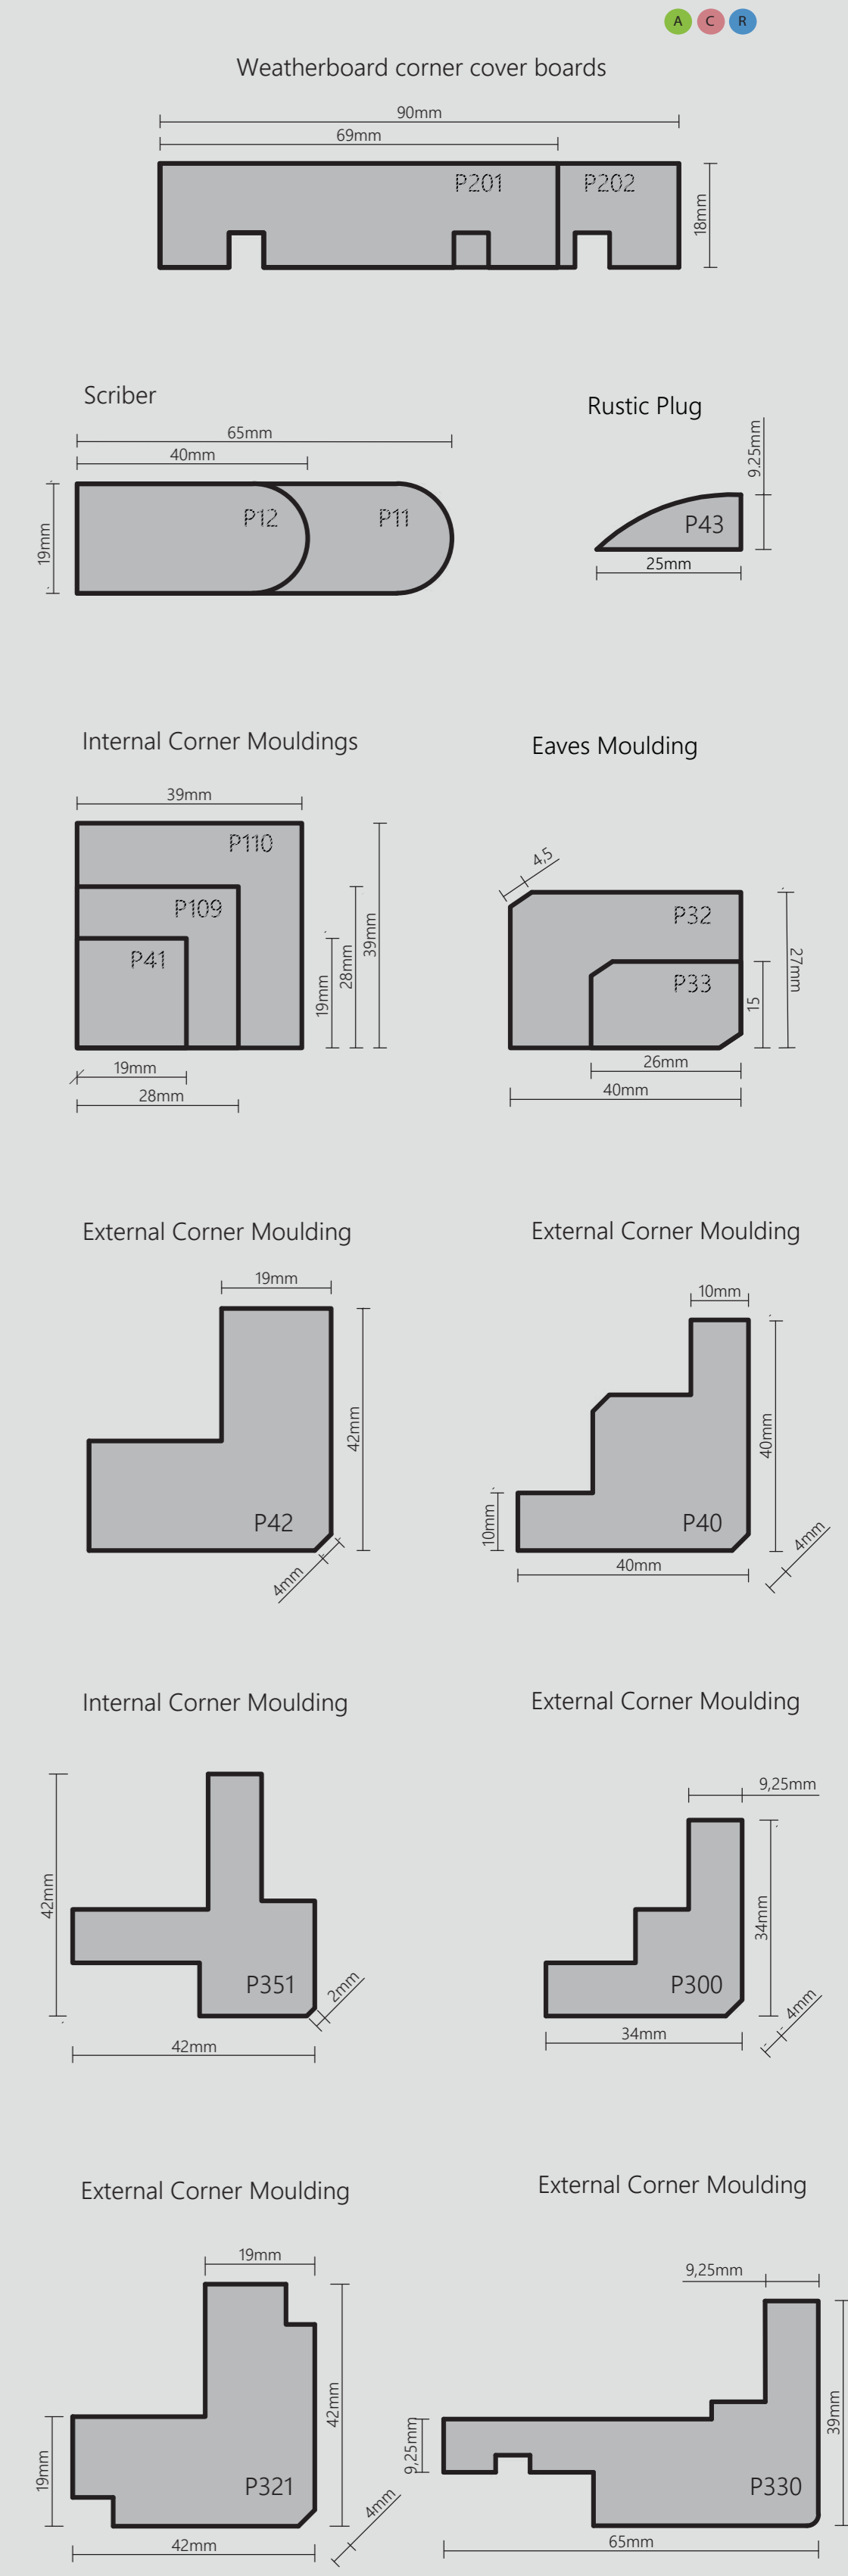

Notes:

- All profiles are available in paint quality finish with a 2mm radius.
- The chart above shows the standard profiles. Custom profiles are available on request at www.ititimspec.nz.
- Thickness of profiles may vary depending on species. Generally thickness varies from 19mm & 32mm for Accoya, 19mm & 28mm for Radiata Pine and 18.5mm & 28mm for Western Red Cedar.
- For New Zealand Building Code compliance & installation, please refer to ITI Timspec-CertClad manuals or email sales@ititimspec.co.nz
- CodeMark profiles are marked above.
- Accoya and Radiata Pine are FSC® certified. (Look for our FSC® certified products).
- Western Red Cedar is PEFC® certified.
- Not all profiles are stocked but available on order.